


**1000°F / 537°C: DeltaMax™ Very High Temperature, Heat and Flame Resistant Fiberglass Insulation Felt / Matt / Batt**  
*Premium Grade*

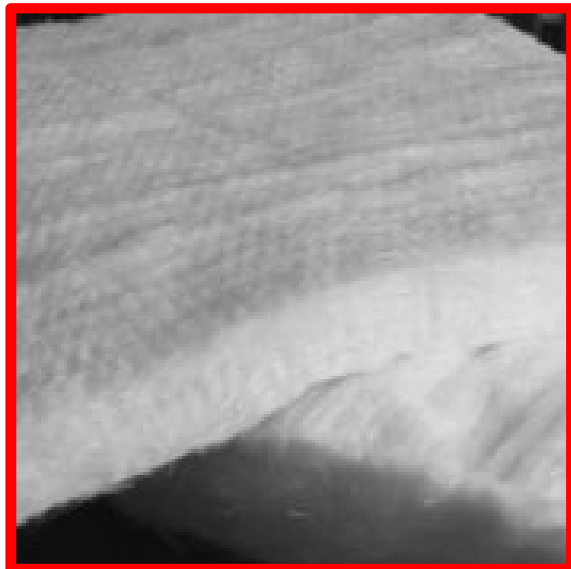

- Excellent insulation for sandwiching between front and rear (hot and cold side) layers of blankets & curtains.
- Non-flammable.
- Conforms to MIL-I-16411 Type II.
- Meets US Coast Guard 164.009 for incombustible materials.
- Meets MIL-I-24244 for corrosiveness.
- Thermal conductivity of .43 at 500°F and .536 at 649°F.

1000°F / 537°C continuous rating, high insulation value

Needed fiberglass insulation felt / matt / batt is manufactured from 100% non-woven E-type fiberglass textile fibers. It is used in a variety of applications and specifically designed for use in aerospace, automotive, construction and industrial applications due to its low corrosiveness (meeting MIL-I-24244).

Used extensively in the production of removable pads for welding stress relieving, furnace and oven wall gap insulation, removable pipe insulation, gas and steam turbine power generating equipment blankets, etc.

<b>Very High Temperature, Heat and Flame Resistant Fiberglass                      Insulation Felt / Matt / Batt</b> <i>Premium Grade</i>									
Part Number	Thickness in / mm		Density lbs/ft <sup>3</sup> / kg/m <sup>3</sup>		Roll Width in / cm		Roll Length ft / m		Price per Yard / Metre
IM-NFI-04	¼	7	9	169	60	152	100	30.4	\$ 25.20 / \$ 27.47
IM-NFI-08	½	13	9	169	60	152	75	22.8	\$ 35.40 / \$ 38.59
IM-NFI-16	1	25	9	169	60	152	45	13.7	\$ 49.98 / \$ 54.48

**This Product is Available By-The-Yard / Metre**