


## High Temperature Silicone Rubber Coated Fiberglass Sleeve for EAF & Water Cooled High-Current Cable: *Small Diameter*

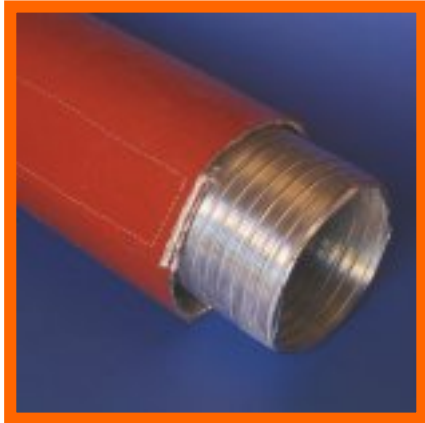

- Protection from Heat, Flame, Molten Splash, Slag, Wet Charges, Welding Splatter, Welding & Grinding Sparks, Contamination, Ozone, UV and Abrasion
- Prevents unexpected cable failures.
- Contains no metallic components and does not interfere with the operation of the furnace.
- This EAF Cable Cover is designed to provide full protection to water cooled power cables on both AC and DC electric arc furnaces.


500°F / 260°C continuous rating with weld splatter / molten metal splash protection

Heavy Duty Cover for EAF Cable & Water Cooled High-Current Cable: <i>Small Diameter</i>					
Nominal ID inches / mm / Dash #			Part Number	Velcro Width	Price Per Foot
1	25	-16	AB-SREAFCC-M025-16	3/4	\$ 20.29
1 1/4	32	-20	AB-SREAFCC-M032-20	3/4	\$ 22.60
1 1/2	38	-24	AB-SREAFCC-M038-24	3/4	\$ 24.83
1 3/4	44	-28	AB-SREAFCC-M044-28	3/4	\$ 26.77
2	51	-32	AB-SREAFCC-M051-32	3/4	\$ 29.00
2 1/4	57	-36	AB-SREAFCC-M057-36	3/4	\$ 31.23
2 1/2	64	-40	AB-SREAFCC-M064-40	3/4	\$ 33.49
2 3/4	70	-44	AB-SREAFCC-M070-44	3/4	\$ 35.80
3	76	-48	AB-SREAFCC-M076-48	3/4	\$ 37.94
3 1/4	83	-52	AB-SREAFCC-M083-52	3/4	\$ 40.34
3 1/2	89	-56	AB-SREAFCC-M089-56	3/4	\$ 42.29
3 3/4	95	-60	AB-SREAFCC-M095-60	3/4	\$ 44.51
4	102	-64	AB-SREAFCC-M102-64	2	\$ 48.37
4 1/4	108	-68	AB-SREAFCC-M108-68	2	\$ 50.54
4 1/2	114	-72	AB-SREAFCC-M114-72	2	\$ 52.94
4 3/4	121	-76	AB-SREAFCC-M121-76	2	\$ 55.17
5	127	-80	AB-SREAFCC-M127-80	2	\$ 57.54
5 1/4	133	-84	AB-SREAFCC-M133-84	2	\$ 59.37
5 1/2	140	-88	AB-SREAFCC-M140-88	2	\$ 61.66
5 3/4	146	-92	AB-SREAFCC-M146-92	2	\$ 63.94

Available in continuous lengths up to 150 feet.

**This Product is Available By-The-Foot**

## High Temperature Silicone Rubber Coated Fiberglass Sleeve for EAF & Water Cooled High-Current Cable: *Large Diameter*

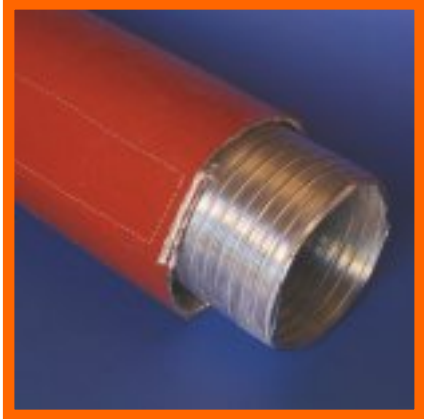

Protection from Flame, Molten Splash, Slag, Welding Splatter, Welding & Grinding Sparks, Contamination, Ozone, UV and Abrasion.

Prevents unexpected cable failures.

Contains no metallic components and does not interfere with the operation of the furnace.

This EAF Cable Cover is designed to provide full protection to water cooled power cables on both AC and DC Electric Arc Furnaces. Wet charge splashes are no problem due to the extra thick coating of silicone rubber.

500°F / 260°C continuous rating with weld splatter / molten metal splash protection

Heavy Duty Cover for EAF Cable & Water Cooled High Current Cable: Large Diameter					
Nominal ID inches / mm / Dash #			Part Number	Velcro Width	Price Per Foot
6	152	-96	AB-SREAFCC-M152-96	2	\$ 66.11
6 1/4	159	-100	AB-SREAFCC-M159-100	2	\$ 68.51
6 1/2	165	-104	AB-SREAFCC-M165-104	2	\$ 70.74
6 3/4	171	-108	AB-SREAFCC-M171-108	2	\$ 72.74
7	178	-112	AB-SREAFCC-M178-112	2	\$ 74.97
7 1/4	184	-116	AB-SREAFCC-M184-116	2	\$ 76.97
7 1/2	191	-120	AB-SREAFCC-M191-120	2	\$ 79.54
7 3/4	197	-124	AB-SREAFCC-M197-124	2	\$ 81.77
8	203	-128	AB-SREAFCC-M203-128	2	\$ 83.69
8 1/4	210	-132	AB-SREAFCC-M210-132	2	\$ 86.26
8 1/2	216	-136	AB-SREAFCC-M216-136	2	\$ 88.43
8 3/4	222	-140	AB-SREAFCC-M222-140	2	\$ 90.23
9	229	-144	AB-SREAFCC-M229-144	2	\$ 92.57
9 1/4	235	-148	AB-SREAFCC-M235-148	2	\$ 94.49
9 1/2	241	-152	AB-SREAFCC-M241-152	2	\$ 97.20
9 3/4	248	-156	AB-SREAFCC-M248-156	2	\$ 99.37
10	254	-160	AB-SREAFCC-M254-160	2	\$101.66
10 1/4	260	-164	AB-SREAFCC-M260-164	2	\$104.00
10 1/2	267	-168	AB-SREAFCC-M267-168	2	\$ 105.60
10 3/4	273	-172	AB-SREAFCC-M273-172	2	\$ 113.31
11	279	-176	AB-SREAFCC-M279-176	2	\$ 115.66
11 1/4	286	-180	AB-SREAFCC-M286-180	2	\$ 118.51
11 1/2	292	-184	AB-SREAFCC-M292-184	2	\$ 122.37
11 3/4	298	-188	AB-SREAFCC-M298-188	2	\$ 126.22
12	305	-192	AB-SREAFCC-M305-192	1 1/2	\$ 129.41

Available in continuous lengths up to 150 feet.

**This Product is Available By-The-Foot**