

1000°F / 537°C: DeltaGlass™ Fiberglass Knitted Tape

Very High Temperature & Heat Resistant

Plain Tape & Bolt Hole / Ladder Tape: *Premium Grade*



These knitted tapes are fabricated from high quality type E fiberglass that will not burn and will withstand continuous exposure to temperatures of 1000°F / 537°C.

This material resists most acids and alkalis and is unaffected by most bleaches and solvents. It is highly flexible and conformable.

The base fiber is manufactured to the specifications of ASTM D-578, ASTM committee D13, and subcommittee D13.18.

Knitted tapes are extremely flexible and conformable, more so than the same dimension tape in a woven style.

Texturized yarn ensures high bulk and insulation value.

1000°F / 537°C continuous rating, high insulation value & excellent personnel protection

Very High Temperature & Heat Resistant Fiberglass Knitted Tape: Plain & Bolt Hole - <i>Premium</i>				
1/8" / 3mm Thick Knitted Plain Tape				
Width inch / mm / dash #			Part Number	Price per Roll
1"	25	-16	T-FG-K-M025-16	\$ 71.67
1 1/4"	32	-20	T-FG-K-M032-20	\$ 90.00
1 1/2"	38	-24	T-FG-K-M038-24	\$ 110.00
1 3/4"	44	-28	T-FG-K-M044-28	\$ 135.00
2"	51	-32	T-FG-K-M051-32	\$ 156.67
2 1/2"	64	-40	T-FG-K-M064-40	\$ 180.00
3"	76	-48	T-FG-K-M076-48	\$ 210.00
4"	102	-64	T-FG-K-M102-64	\$ 256.67
5"	127	-80	T-FG-K-M127-80	\$ 306.67
1/8" / 3mm Thick Knitted Bolt Hole / Ladder Tape				
Width inch / mm / dash #			Part Number	Price per Roll
1"	25	-16	T-FG-K-BH-M025-16	\$ 61.67
1 1/4"	32	-20	T-FG-K-BH-M032-20	\$ 78.33
1 1/2"	38	-24	T-FG-K-BH-M038-24	\$ 90.00
1 3/4"	44	-28	T-FG-K-BH-M044-28	\$ 100.00
2"	51	-32	T-FG-K-BH-M051-32	\$ 110.00
2 1/2"	64	-40	T-FG-K-BH-M064-40	\$ 133.33
3"	76	-48	T-FG-K-BH-M076-48	\$ 163.33
4"	102	-64	T-FG-K-BH-M102-64	\$ 210.00
5"	127	-80	T-FG-K-BH-M127-80	\$ 260.00

Each roll contains 100 feet / 30 metres.

This Product is NOT Available By-The-Foot – Full Rolls Only

To aid in mounting this tape onto surfaces, FlangeStik™ pressure sensitive adhesive spray can be used to place the tape in situ temporarily. Permanent fasteners or grab strips should be installed prior to heating of the area sprayed above 200°F. The adhesive will “smoke-off” at elevated temperatures.

1000°F / 537°C: DeltaGlass™ Woven Fiberglass Tape: Premium Grade Very High Temperature & Heat Resistant Plain & Bolt-Hole / Ladder Tape



Manufactured of texturized fiberglass yarns, this tape will withstand temperatures up to 1000°F / 537°C in continuous service. 100% asbestos free, this tape is a bright white color.

This tape offers superior insulating properties as well as low chloride content.

Offered in *Plain* and *Drop Warp* (also known as *Bolt-Hole* or *LadderTape™*). Drop Warp tape has lengthwise yarns missing from the center of the tape to allow fasteners to pass through the tape for assembly onto access doors, etc.

Premium grade tape has a higher bulk than Industrial grade (the same size tape weighs more in Premium grade than Industrial grade as it has more fiberglass content). Also available with Pressure Sensitive Adhesive (PSA) (see following page in catalog).

1000°F / 537°C continuous rating, high insulation value & excellent personnel protection

Very High Temperature & Heat Resistant Fiberglass Woven Plain & Bolt-Hole / LadderTape™ - Premium Grade					
Part Number	Width in / mm		Price per Roll By Thickness		
			"A" thickness Price / Weight (lb)	"B" thickness Price / Weight (lb)	"C" thickness Price / Weight (lb)
T-FG-W-P-M013-08-X-Z**	.5	13	\$ 34.20 / 1.0	\$ 44.43 / 2.2	NA
T-FG-W-P-M019-12-X-Z**	.75	19	\$ 49.60 / 1.6	\$ 55.70 / 3.2	\$ 88.87 / 6.9
T-FG-W-P-M025-16-X-Z	1.0	25	\$ 36.73 / 2.1	\$ 58.44 / 4.2	\$ 128.26 / 9.8
T-FG-W-P-M032-20-X-Z	1.25	32	\$ 38.73 / 2.5	\$ 59.73 / 5.2	\$ 146.83 / 12.6
T-FG-W-P-M038-24-X-Z	1.5	38	\$ 40.13 / 3.0	\$ 60.55 / 6.2	\$ 174.43 / 14.6
T-FG-W-P-M051-32-X-Z	2.0	51	\$ 44.73 / 4.1	\$ 70.80 / 8.2	\$ 188.71 / 19.5
T-FG-W-P-M064-40-X-Z	2.5	64	\$ 49.86 / 5.1	\$ 82.20 / 10.2	\$ 214.66 / 24.4
T-FG-W-P-M076-48-X-Z	3.0	76	\$ 58.23 / 6.2	\$ 99.20 / 12.2	\$ 244.70 / 29.3
T-FG-W-P-M089-56-X-Z	3.5	89	\$ 66.43 / 7.3	\$ 110.86 / 14.2	\$ 286.43 / 34.2
T-FG-W-P-M102-64-X-Z	4.0	102	\$ 75.60 / 8.2	\$ 123.16 / 16.5	\$ 303.16 / 39.0
T-FG-W-P-M114-72-X-Z	4.5	114	\$ 90.77 / 9.2	\$ 163.21 / 18.5	\$ 348.44 / 44.0
T-FG-W-P-M127-80-X-Z	5.0	127	\$ 92.73 / 10.3	\$ 169.93 / 20.5	\$ 379.46 / 48.8
T-FG-W-P-M140-88-X-Z	5.5	140	\$ 96.73 / 11.3	\$ 177.93 / 22.5	\$ 398.46 / 53.7
T-FG-W-P-M152-96-X-Z	6.0	152	\$ 117.03 / 12.3	\$ 187.46 / 24.5	\$ 423.10 / 58.6

- For the "X" Value, specify A, B or C in part number to correspond to the desired thickness
A = 1/16" / .0625" / 1.59mm **B** = 1/8" / .125" / 3.18mm **C** = 1/4" / .250" / 6.35mm
- For the "Z" value in part number: use "-P" for Plain style tape or "-DW" for Drop Warp style tape. Same price either version.
- All tapes are 100 foot / 30 metre lengths.
- Items with * may have higher minimum order quantities – please call.
- ** -08 / .5" / 13mm and -12 / .75" / 19mm width tapes are not available in Drop Warp

Custom width tapes: Minimum 20 rolls or \$650 setup charge for lower quantities.

1000°F / 537°C: DeltaGlass™ Woven Fiberglass Tape: Premium Grade Very High Temperature & Heat Resistant Plain & Bolt-Hole / Ladder Tape with Adhesive PSA



Manufactured of texturized fiberglass yarns, this tape will withstand temperatures up to 1000°F / 537°C in continuous service. 100% asbestos free, this tape is a bright white color.

This tape offers superior insulating properties as well as low chloride content.

Offered in *Plain* and *Drop Warp* (also known as *Bolt-Hole* or *LadderTape™*). Drop Warp tape has lengthwise yarns missing from the center of the tape to allow fasteners to pass through the tape for assembly onto access doors, etc.

Premium grade tape has a higher bulk than Industrial grade (the same size tape weighs more in Premium grade than Industrial grade as it has more fiberglass content). Also available without Pressure Sensitive Adhesive (PSA) (see previous page in catalog).

1000°F / 537°C continuous rating, high insulation value & excellent personnel protection

Very High Temperature & Heat Resistant Fiberglass Woven Plain & Bolt-Hole / LadderTape™ - Premium Grade					
Part Number	Width in / mm		Price per Roll By Thickness		
			"A" thickness Price	"B" thickness Price	"C" thickness Price
T-FG-W-P-M013-08-X-Z-PSA**	.5	13	\$ 77.17	\$ 87.40	NA
T-FG-W-P-M019-12-X-Z-PSA**	.75	19	\$ 83.63	\$ 92.60	\$ 137.03
T-FG-W-P-M025-16-X-Z-PSA	1.0	25	\$ 87.03	\$ 100.23	\$ 178.23
T-FG-W-P-M032-20-X-Z-PSA	1.25	32	\$ 97.88	\$ 117.03	\$ 193.50
T-FG-W-P-M038-24-X-Z-PSA	1.5	38	\$ 100.13	\$ 119.87	\$ 227.77
T-FG-W-P-M051-32-X-Z-PSA	2.0	51	\$ 111.50	\$ 137.27	\$ 252.83
T-FG-W-P-M064-40-X-Z-PSA	2.5	64	\$ 124.87	\$ 157.20	\$ 289.43
T-FG-W-P-M076-48-X-Z-PSA	3.0	76	\$ 139.46	\$ 180.70	\$ 326.36
T-FG-W-P-M089-56-X-Z-PSA	3.5	89	\$ 146.40	\$ 193.86	\$ 396.96
T-FG-W-P-M102-64-X-Z-PSA	4.0	102	\$ 185.46	\$ 216.00	\$ 396.73
T-FG-W-P-M114-72-X-Z-PSA	4.5	114	\$ 191.43	\$ 247.63	\$ 437.71
T-FG-W-P-M127-80-X-Z-PSA	5.0	127	\$ 212.33	\$ 281.20	\$ 491.40
T-FG-W-P-M140-88-X-Z-PSA	5.5	140	\$ 219.33	\$ 288.20	\$ 501.40
T-FG-W-P-M152-96-X-Z-PSA	6.0	152	\$ 227.36	\$ 295.23	\$ 518.20

- For the "X" Value, specify A, B or C in part number to correspond to the desired thickness
A = 1/16" / .0625" / 1.59mm **B** = 1/8" / .125" / 3.18mm **C** = ¼" / .250" / 6.35mm
- For the "Z" value in part number: use "-P" for Plain style tape or "-DW" for Drop Warp style tape. Same price either version.
- All tapes are 100 foot / 30 metre lengths.
- Items with * may have higher minimum order quantities – please call.
- ** -08 / .5" / 13mm and -12 / .75" / 19mm width tapes are not available in Drop Warp

Custom width tapes: Minimum 20 rolls or \$650 setup charge for lower quantities.

**1000°F / 537°C: DeltaGlass™ Woven Fiberglass Tape: Premium Grade
Very High Temperature & Heat Resistant Plain Tape – EXTRA THICK**



Manufactured of texturized fiberglass yarns, this tape will withstand temperatures up to 1000°F / 537°C in continuous service. 100% asbestos free, this tape is a bright white color.

This tape offers superior insulating properties as well as low chloride content.

This is the thickest woven fiberglass tape available at 9/32" – 0.280" – 7.2mm thick.

1000°F / 537°C continuous rating, high insulation value & excellent personnel protection

Very High Temperature & Heat Resistant Fiberglass Woven Plain Tape – EXTRA THICK - Premium Grade			
Part Number	Width in / mm		Price / Weight (lb) per roll
T-FG-W-XTP-M025-16	1.0	25	\$ 241.08 / 11.3
T-FG-W-XTP-M038-24	1.5	38	\$ 320.67 / 16.8
T-FG-W-XTP-M051-32	2.0	51	\$ 425.88 / 22.5
T-FG-W-XTP-M064-40	2.5	64	\$ 498.86 / 28.1
T-FG-W-XTP-M076-48	3.0	76	\$ 621.48 / 33.7
T-FG-W-XTP-M089-56	3.5	89	\$ 678.53 / 39.4
T-FG-W-XTP-M102-64	4.0	102	\$ 770.96 / 45.1
T-FG-W-XTP-M127-80	5.0	127	\$ 1025.13 / 56.3
T-FG-W-XTP-M152-96	6.0	152	\$ 1212.63 / 67.5
T-FG-W-XTP-M254-160	10.0	254	\$ 1956.76 / 107
T-FG-W-XTP-M305-192	12.0	305	\$ 2338.00 / 135

- All tapes are 100 foot / 30 metre lengths.
- Available with CofC to MIL-I-24244C (Amend 1, IC 1, Type XVIII)
- Test Report is available at \$1565.00 per batch
 - Minimum 6 rolls for 6", 10" and 12" widths, but check if we may have smaller minimum quantity available.

Custom width tapes: Minimum 20 rolls or \$650 setup charge for lower quantities.

1000°F / 537°C: DeltaGlass™ Woven Fiberglass Tape: Premium Grade
Very High Temperature & Heat Resistant Plain Tape: EXTRA WIDE



Manufactured of texturized fiberglass yarns, this tape will withstand temperatures up to 1000°F / 537°C in continuous service. 100% asbestos free, this tape is a bright white color.

This tape offers superior insulating properties as well as low chloride content.

Premium grade tape has a higher bulk than Industrial grade (the same size tape weighs more in Premium grade than Industrial grade as it has more fibreglass content).


1000°F / 537°C continuous rating, high insulation value & excellent personnel protection

Very High Temperature & Heat Resistant Fiberglass Woven Plain Tape: EXTRA WIDE - Premium Grade					
Part Number	Width in / mm		Price per Roll By Thickness		
			"A" thickness Price / Weight (lb)	"B" thickness Price / Weight (lb)	"C" thickness Price / Weight (lb)
T-FG-W-EWP-M178-112-X	7	178	\$ 257.60 / 14.4	\$ 526.31 / 28.7	\$ 1108.82 / 68.4
T-FG-W-EWP-M203-128-X	8	203	\$ 296.47 / 16.4	\$ 620.62 / 32.7	\$ 1266.97 / 78.2
T-FG-W-EWP-M228-144-X	9	228	\$ 315.54 / 18.5	\$ 658.91 / 36.9	\$ 1342.36 / 88.0
T-FG-W-EWP-M254-160-X	10	254	\$ 352.45 / 20.6	\$ 735.51 / 41.1	\$ 1492.56 / 97.8
T-FG-W-EWP-M279-176-X	11	279	\$ 389.25 / 22.7	\$ 812.16 / 45.3	\$ 1642.74 / 107.6
T-FG-W-EWP-M305-192-X	12	305	\$ 429.05 / 24.8	\$ 894.93 / 50.0	\$ 1792.88 / 117.4

- Minimum order is 6 rolls
- For the "X" Value, specify A, B or C in part number to correspond to the desired thickness
A = 1/16" / .0625" / 1.59mm B = 1/8" / .125" / 3.18mm C = 1/4" / .250" / 6.35mm
- All tapes are 100 foot / 30 metre lengths.

Custom width tapes: Minimum 20 rolls or \$650 setup charge for lower quantities.

1000°F / 537°C: Fiberglass Woven Tape: Industrial Grade
Very High Temperature & Heat Resistant Plain & Bolt-Hole / Ladder Tape

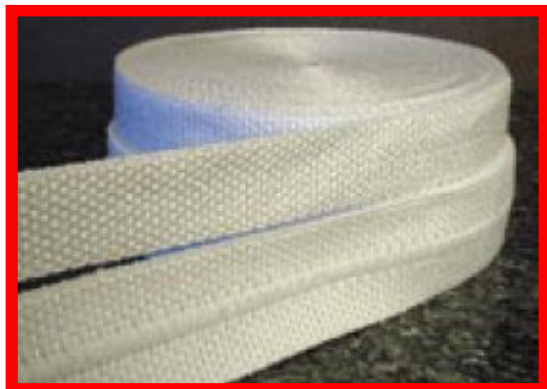

Manufactured of texturized fiberglass yarns, tape will withstand temperatures up to 1000°F / 537°C in continuous service.

tape offers superior insulating properties as well as low chloride content.

Offered in *Plain* and *Drop Warp* (also known as *Bolt-Hole* or *LadderTape™*). Drop Warp tape has lengthwise yarns missing from the center of the tape to allow fasteners to pass through the tape for assembly onto access doors, etc. This is also called a Ladder or Bolthole tape.

Industrial grade tape has a lower bulk than Premium grade (the same size tape weighs more in Premium grade than Industrial grade as it has more fiberglass content). Available with and without Pressure Sensitive Adhesive (PSA).

1000°F / 537°C continuous rating, high insulation value & excellent personnel protection

Very High Temperature & Heat Resistant Fiberglass Woven Plain & Bolt-Hole / LadderTape™ - Industrial Grade				
Part Number	Width in / mm		Price per Roll By Thickness: A / B	
			"A" thickness no PSA / with PSA	"B" thickness no PSA / with PSA
T-FG-WI-M013-08-X-Z**	.5	13	\$ 102.63 / \$ 218.13	\$ 37.30 / \$ 80.26
T-FG-WI-M019-12-X-Z**	.75	19	\$ 20.46 / \$ 69.40	\$ 38.74 / \$ 86.22
T-FG-W-I-M025-16-X-Z	1.0	25	\$ 23.90 / \$ 74.16	\$ 38.56 / \$ 88.43
T-FG-W-I-M032-20-X-Z	1.25	32	\$ 29.63 / \$ 88.53	\$ 43.80 / \$ 99.20
T-FG-W-I-M038-24-X-Z	1.5	38	\$ 29.86 / \$ 89.46	\$ 45.48 / \$ 108.06
T-FG-W-I-M051-32-X-Z	2.0	51	\$ 34.43 / \$ 101.76	\$ 50.50 / \$ 117.83
T-FG-W-I-M064-40-X-Z	2.5	64	\$ 48.63 / \$ 123.16	\$ 65.80 / \$ 140.96
T-FG-W-I-M076-48-X-Z	3.0	76	\$ 53.03 / \$ 135.23	\$ 67.10 / \$ 147.50
T-FG-W-I-M089-56-X-Z	3.5	89	\$ 59.66 / \$ 141.13	\$ 78.66 / \$ 156.13
T-FG-W-I-M102-64-X-Z	4.0	102	\$ 63.16 / \$ 157.93	\$ 87.76 / \$ 168.53
T-FG-W-I-M114-72-X-Z	4.5	114	\$ 71.46 / \$ 169.93	\$ 94.51 / \$ 188.79
T-FG-W-I-M127-80-X-Z	5.0	127	\$ 79.53 / \$ 191.70	\$ 109.80 / \$ 203.96
T-FG-W-I-M140-88-X-Z	5.5	140	\$ 92.17 / \$ 201.33	\$ 120.27 / \$ 217.31
T-FG-W-I-M152-96-X-Z	6.0	152	\$ 108.73 / \$ 213.00	\$ 126.36 / \$ 229.63

Darco McAllister Newtex

- For the "X" value, specify "A" or "B" in part number to correspond to the desired thickness
 A = 1/16" / .0625" / 1.59mm B = 1/8" / .125" / 3.18mm
- For "Z" value in part number: use "-P" for Plain style tape or "-DW" for Drop Warp style tape
 Same price either version.
- All tapes are 100 foot / 30 metre lengths.
- Items with * may have higher minimum order quantities – please call.
- ** .5"/13mm and .75"/19mm width tapes are not available in Drop Warp

1000°F / 537°C: Fiberglass Woven Tape:
Premium Grade / Special Thin
Very High Temperature & Heat Resistant Plain & Bolt-Hole / LadderTape™



Manufactured of texturized fiberglass yarns, this tape will withstand temperatures up to 1000°F / 537°C in continuous service.

This tape offers superior insulating properties as well as low chloride content.

Offered in *Plain* and *Drop Warp* (also known as *Bolt-Hole* or *LadderTape™*). Drop Warp tape has lengthwise yarns missing from the center of the tape to allow fasteners to pass through the tape for assembly onto access doors, etc.

1000°F / 537°C continuous rating, high insulation value & excellent personnel protection

Very High Temperature & Heat Resistant Fiberglass Woven Plain & Bolt-Hole / LadderTape™ Premium Grade / Special Thin 1/32" / .0313" / 0.8mm Thickness				
Part Number	Width in / mm		Price per Roll	
			no PSA	with PSA
T-FG-WP-T-M013-08-X**	.5	13	\$ 16.88	\$ 27.43
T-FG-W-P-T-M025-16-X	1.0	25	\$ 24.20	\$ 37.23
T-FG-W-P-T-M038-24-X	1.5	38	\$ 31.40	\$ 54.13
T-FG-W-P-T-M051-32-X	2.0	51	\$ 37.73	\$ 65.33
T-FG-W-P-T-M064-40-X	2.5	64	\$ 45.10	\$ 85.90
T-FG-W-P-T-M076-48-X	3.0	76	\$ 52.53	\$ 106.37
T-FG-W-P-T-M089-56-X	3.5	89	\$ 60.47	\$ 120.86
T-FG-W-P-T-M102-64-X	4.0	102	\$ 67.80	\$ 135.40
T-FG-W-P-T-M114-72-X	4.5	114	\$ 75.63	\$ 149.30
T-FG-W-P-T-M127-80-X	5.0	127	\$ 82.73	\$ 163.13
T-FG-W-P-T-M140-88-X	5.5	140	\$ 89.96	\$ 176.47
T-FG-W-P-T-M152-96-X	6.0	152	\$ 96.90	\$ 189.80

- This tape is 1/32" / .0313" / 0.8mm thick
- For the "X" value in part number: use "-P" for Plain style tape
or "-DW" for Drop Warp style tape.
Same price either style.
- Add "-PSA" to the part number for tape with PSA coating.
- All tapes are 100 foot / 30 metre lengths.
- ** -08 / .5" / 13mm width tapes are not available in Drop Warp